FORMORE

ANNUAL BROCHURE _ INDOOR SERIES

Specialized in manufacturing high quality dia-casting aluminum led light housing, indoor light &outdoor light & led solar light.

LIGHT AS YOU LIKE

FORMORE

INDOOR LIGHTING SERIES

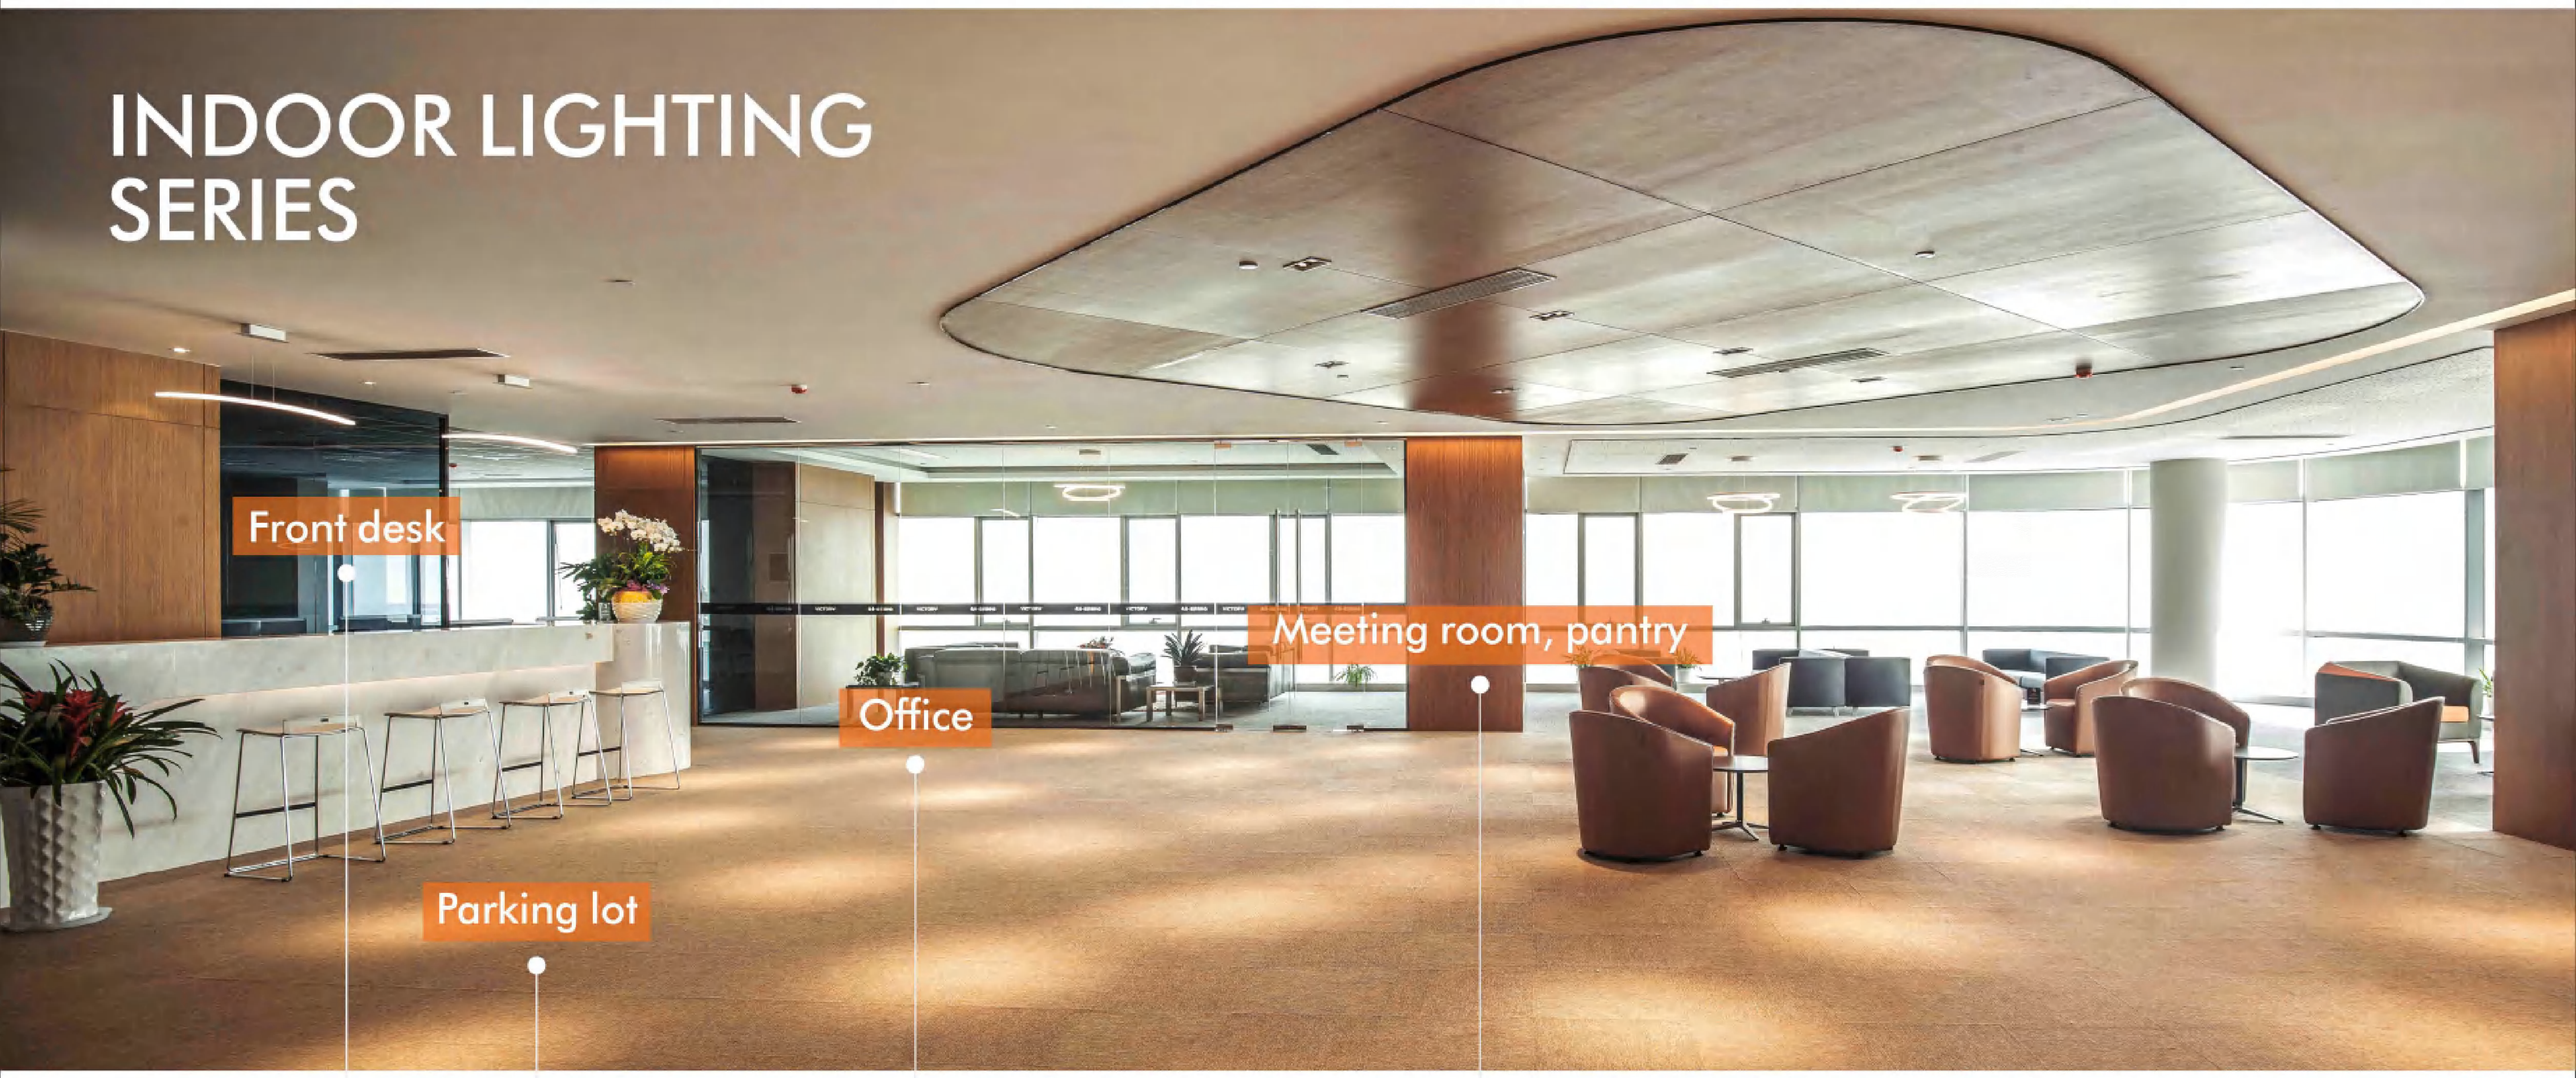

QUICK INDEX

LED RECESSED LIGHT

TUYA PANEL LIGHT

TUYA SMART PANEL LIGHT

SLIM PANEL LIGHT

LED ETL PANEL LIGHT

SURFACED PANEL LIGHT

EDGELESS PANEL LIGHT

PC DOWN LIGHT

LED NIGHTLUX PANEL LIGHT

LED CEILING LIGHT

COB DOWN LIGHT

PROLITE COB

LED PANEL LIGHT

LED EDGLITE PANEL LIGHT

ETL BACKLITE PANEL LIGHT

LED BACKLITE PANEL LIGHT

LED LINEAR LIGHT

MODEL 29 SERIES

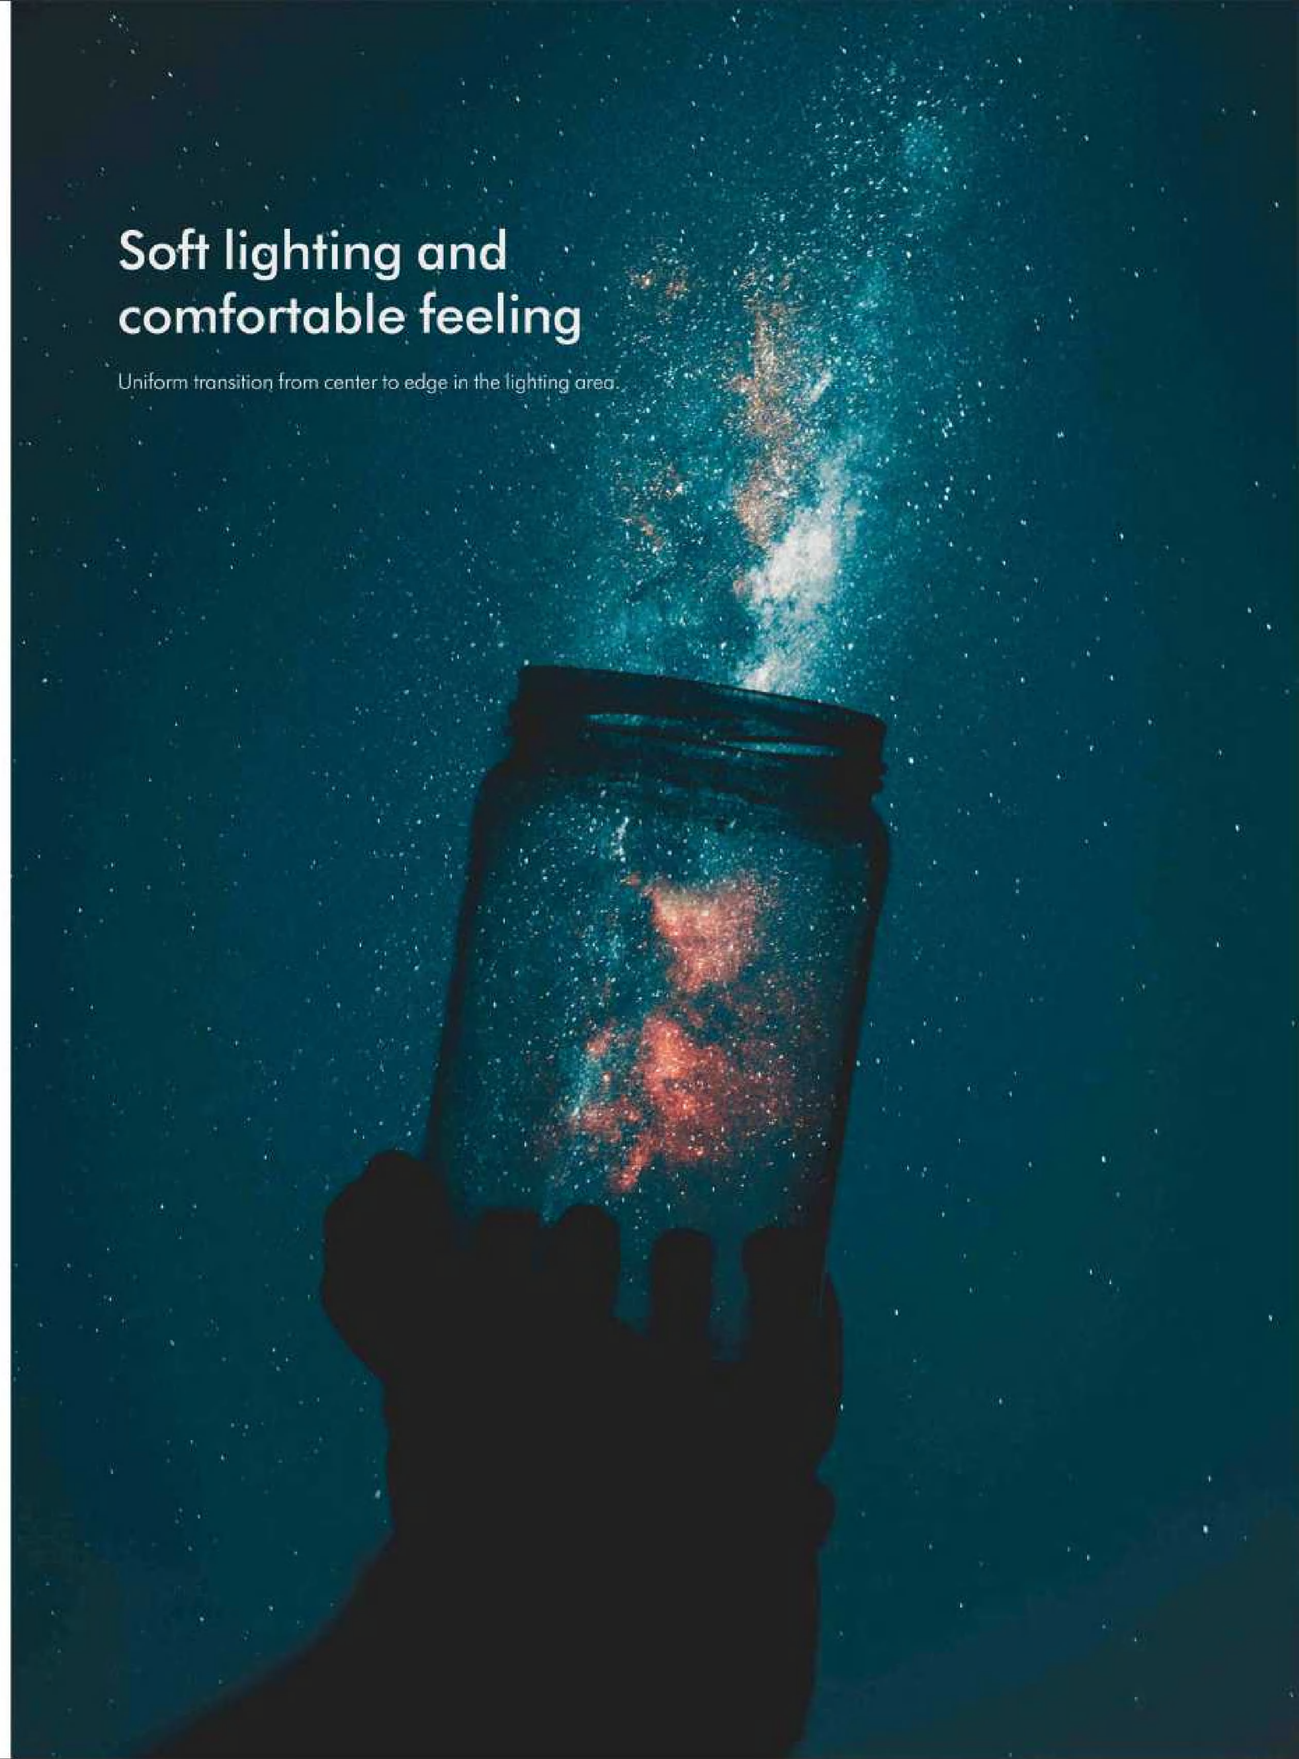

SMART APP CONTROL
RGB+CCT RECESS DOWN LIGHT

High Quality · High Brightness · Energy Saving · Long Life · Maintenance-free

DESCRIPTIONS

- Our new smart LED panel light will be a great addition to any project.
- The sleek and minimal construction allows for the easiest of installations with the added bonus of a wide range of colors and settings made possible by the TUYA App.

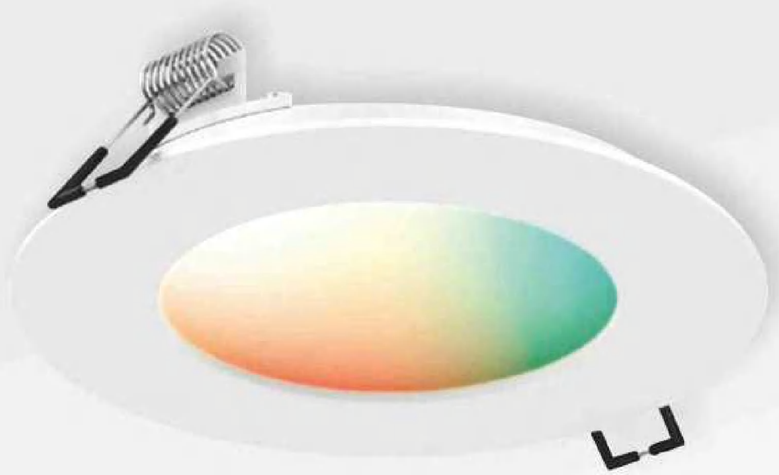

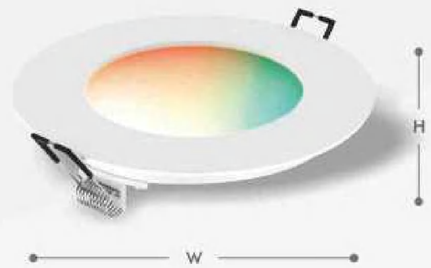

Series	Wattage	Size (WxHxD)in		Cut-out		Lumen
Tuya-WS4021-RS	8W	Ø3.35 Round	3.35x3.35 Square in	Ø2.95	3in	550Lm
Tuya-WS4022-RS	9W	Ø4.72 Round	4.72 Square in	Ø4.25	4in	550Lm
Tuya-WS4024-RS	15W	Ø6.85Round	6.77x6.77 Square in	Ø6.30	6in	1150Lm
Tuya-WS4026-RS	24W	Ø8.82 Round	8.86x8.86 Square in	Ø8.07	8in	1890Lm
Tuya-WS4027-RS	30W	Ø11.69 Round	11.81x11.81 Square in	Ø11.02	10in	2370Lm

Ambient Light

Home Lighting

PRODUCT FEATURES

- Includes a driver box with integrated driver
- Excellent color rendering
- Full color spectrum
- 2700K-6500K in pure whites
- Superior LED performance and lifespan
- Minimal heat emission
- Dimmable through the TUYA Connect app only
- Over 50,000 hours of service life
- Suitable for dry locations• 5-year warranty
- WiFi-no hub needed• Create groups
- Set schedules • Remote access
- Compatible with Google Assistant and Amazon Alexa

Alexa · Google Assistant · App Dimmer · 16 Million Colors · App control · Timer · Cool & Warm

STEPS FOR USAGE

Download App → Registration → Login → Password Retrieva → Add Devices → Control Devices

FORMORE

TUYA SMART PANEL LIGHT

High Quality · High Brightness · Energy Saving · Long Life · Maintenance-free

Series	surfaced panel light series
Tuya -WS4021-R/S 6W	Tuya-WS4027-R/S-6W
Tuya -WS4022-R/S 9W	Tuya-WS4028-R/S-12W
Tuya -WS4023-R/S 12W	Tuya-WS4029-R/S-18W
Tuya -WS4024-R/S 15W	Tuya-WS4030-R/S-24W
Tuya -WS4025-R/S 18W	
Tuya -WS4026-R/S 24W	

Remote Control · Appointment Timing · Cool/Warm Adjustment · Dimming

10:00 at night
Turn off the lights in the living room for you at regular intervals.

TUYA,Please turn off the lights in the living room.

OK,Shutting down...

At mealtime,
Turn the light into a warm color.

FORMORE

STEPS FOR USAGE

Download App → Registration → Login → Password Retrieva → Add Devices → Control Devices

LED ETL PANEL LIGHT

High Quality | High Brightness | Energy Saving | Long Life | Maintenance-free

PRODUCT FEATURES

- High-performance led chip, energy saving, high light efficiency.
- High quality with 5 years warranty, long lifespan≥50,000hrs.
- Green environmental protection, no ultraviolet, infrared and mercury pollution.
- High CRI, intuitive display, different color temperature for option.
- Suspension, Recessed, Ceiling Surface Mounting kit for option.
- Aluminum heat sink material and design, ensure the long lifespan.
- IP Class:IP20.

APPLICATION AREA

Hotel | Offices | Residential | Conference rooms
Schools | Public facilities | Hospitals

HOUSING COLOR OPTIONS

☐ white ☐ black ☐ nickel

Quick connector

Driver

90CRI available

Dimmable down to 5%



Series	Wattage	Size (WxHxD)in		Cut-out		Lumen
ETL-WS4020-RS	8W	Ø3.35 Round	3.35x3.35 Square in	Ø2.95	2.95x2.95 in	550Lm
ETL-WS4021-RS	9W	Ø4.72 Round	4.72 Square in	Ø4.25	4.13x4.13 in	550Lm
ETL-WS4023-RS	15W	Ø6.85Round	6.77x6.77 Square in	Ø6.30	6.10x6.10 in	1150Lm
ETL-WS4025-RS	24W	Ø8.82 Round	8.86x8.86 Square in	Ø8.07	8.07x8.07 in	1890Lm
ETL-WS4026-RS	30W	Ø11.69 Round	11.81x11.81 Square in	Ø11.02	10.94x10.94 in	2370Lm

Voltage: 110V

Low-profile, edge-lit design

3000K 4000K 5000K 6000K 6500K

Dynamic Warm

Dynamic White



Beam angle 120°



Beam illumination height

5 CCT Color Switch

2700K 3000K 3500K 4000K 5000K

Life is long | High brightness | Real light color | Strong heat | Energy saving | Low light failure

FORMORE

LED SURFACED PANEL LIGHT

High Quality | High Brightness | Energy Saving | Long Life | Maintenance-free

PRODUCT FEATURES

- High-performance led chip, energy saving, high light efficiency.
- High quality with 5 years warranty, long lifespan≥50,000hrs.
- Green environmental protection, no ultraviolet, infrared and mercury pollution.
- High CRI, intuitive display, different color temperature for option.
- Ceiling Surface Mounting is applicable.
- Aluminum heat sink material and design, ensure the long lifespan.
- IP Class:IP20.

APPLICATION AREA

Hotel · Offices · Residential · Conference rooms
Schools · Public facilities · Hospital

HOUSING COLOR OPTIONS

□ white □ black □ nickel

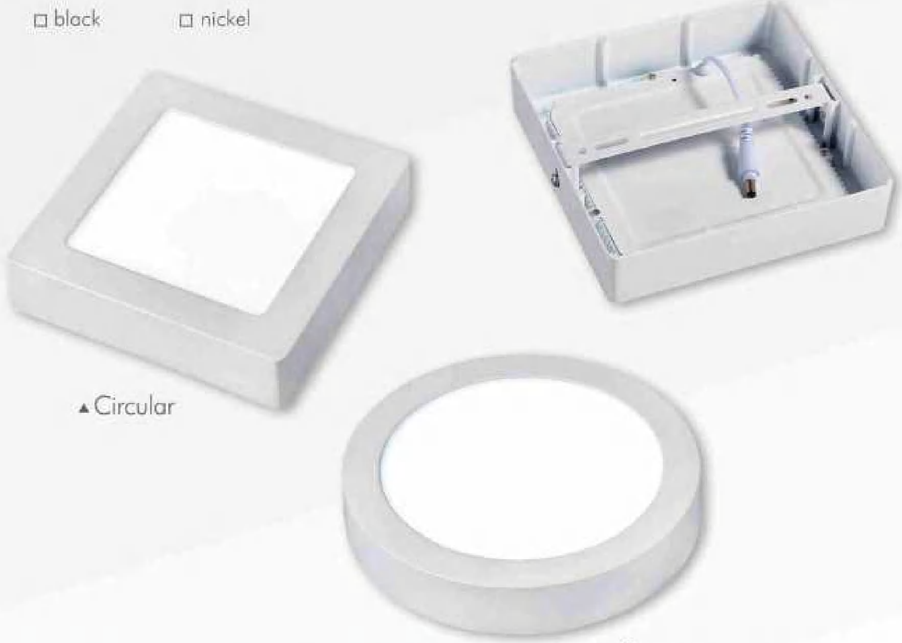

▲Circular

▲Square

AC 85-265V | PF ≥0.9 | CRI 80/90 | DIM | IP40 | 120度

① Two height options:39mm/28mm

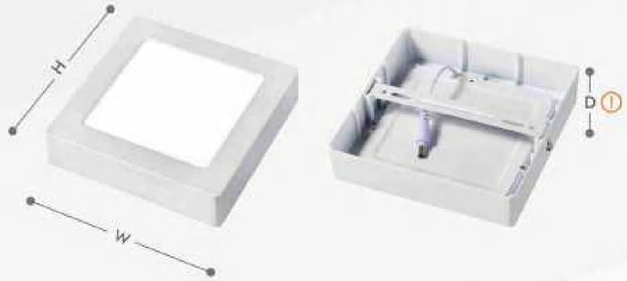

Series	Wattage	Size (WxHxD)mm		Efficiency
WS4027-R/S-6W	6W	Ø120x39mm	121x121x39mm	80Lm/w
WS4027-R/S-12W	12W	Ø174x39mm	174x174x39mm	90Lm/w
WS4027-R/S-18W	18W	Ø227x39mm	227x227x39mm	90Lm/w
WS4027-R/S-24W	24W	Ø300mm	300x300x39mm	90Lm/w

Voltage: AC 85-265V **Shape:** Round/Sqaure

3000K 4000K 5000K 6000K 6500K



Photometry



Beam illumination height

Change your lighting wirelessly | Make (almost)any lamp dimmable | All moods in one bulb | Play with colours

FORMORE

LED EDGELESS PANEL LIGHT

High Quality | High Brightness | Energy Saving | Long Life | Maintenance-free

PRODUCT FEATURES

- High-performance led chip, energy saving, high light efficiency.
- High quality with 3 years warranty, long lifespan ≥50,000 hrs.
- Green environmental protection, no ultraviolet, infrared and mercury pollution.
- High CRI, intuitive display, different color temperature for option.
- Suspension, Recessed, Ceiling Surface Mounting kit for option.
- IP Class:IP20

APPLICATION AREA

Hotel · Offices · Residential · Conference rooms
Schools · Public facilities · Hospital

PC cover material,anti-uv and high temperature resistance.

NO FRAME DESIGN
No frame design,bigger beam angle.

Motion/Light sensor

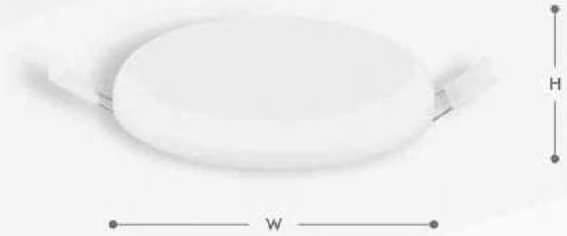

Series	Wattage	Dimension	Cut-out	Efficiency
WSNE01-R/S	8W	Ø74.5x28.5 Round 75.5x75.5x28.5 Square	Ø57 48x48mm Ø2.0in 2.0x2.0in	100Lm/w
WSNE02-R/S	16W	Ø132.2x28.5 Round 132.2x132.2x28.5 Square	Ø107 102x102mm Ø4.0in 4.0x4.0in	100Lm/w
WSNE03-R/S	24W	Ø157.2x28.5 Round 157.2x157.2x28.5 Square	Ø132 129x129mm Ø5.0in 5.0x5.0in	100Lm/w
WSNE04-R/S	30W	Ø207.2x28.5 Round 207.2x207.2x28.5 Square	Ø154 154x154mm Ø6.0in 6.0x6.0in	100Lm/w

Voltage: AC85-265V

3000K · 4000K · 5000K · 6000K · 6500K

Dynamic Warm · Dynamic White



Beam angle 120°



Beam illumination height

120° · 80 CRI · Protect eyes · PC Aluminum · 3 Years · Anti-uv · Human induction

FORMORE

LED SLIM PANEL LIGHT

High Quality | High Brightness | Energy Saving | Long Life | Maintenance-free

PRODUCT FEATURES

- High-performance led chip, energy saving, high light efficiency.
- High quality with 5 years warranty, long lifespan≥50,000hrs.
- Green environmental protection, no ultraviolet, infrared and mercury pollution.
- High CRI, intuitive display, different color temperature for option.
- Suspension, Recessed, Ceiling Surface Mounting kit for option.
- Aluminum heat sink material and design, ensure the long lifespan.
- IP Class:IP20.

APPLICATION AREA

Hotel | Offices | Residential | Conference rooms
Schools | Public facilities | Hospitals

HOUSING COLOR OPTIONS

□ white □ black □ nickel

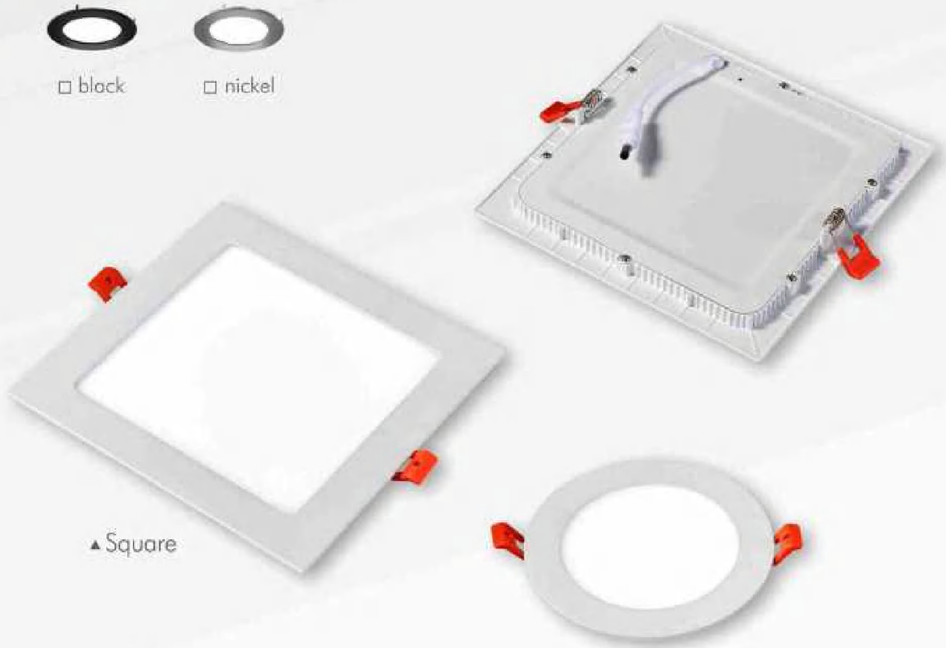

▲Square

▲Round

AC 85-265V | PF ≥0.9 | CRI 80/90 | DIM | IP40 | 120度

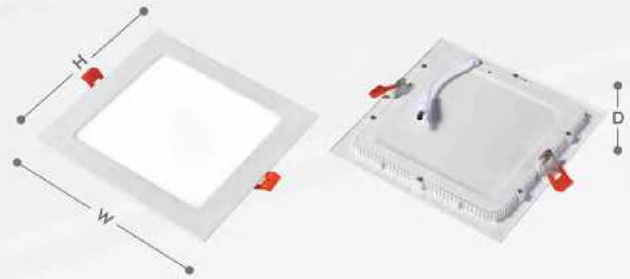

Series	Wattage	Size (WxHxD)mm		Cut-out		Efficiency
WS4020-R/S	3W	Ø85mm Round	85x85mm Square	Ø75	75x75 mm	80Lm/w
WS4021-R/S	6W	Ø120mm Round	120x120mm Square	Ø108	105x105 mm	80Lm/w
WS4022-R/S	9W	Ø146mm Round	147x147mm Square	Ø135	135x135 mm	80Lm/w
WS4023-R/S	12W	Ø174mm Round	172x172mm Square	Ø160	155x155 mm	90Lm/w
WS4024-R/S	15W	Ø200mm Round	202x202mm Square	Ø185	185x185 mm	90Lm/w
WS4025-R/S	18W	Ø224mm Round	225x225mm Square	Ø205	205x205 mm	90Lm/w
WS4026-R/S	24W	Ø297mm Round	300x300mm Square	Ø280	278x278 mm	90Lm/w

Voltage: AC 85-265V **CE.ROHS.SAA.ETL.BIS**

3000K 4000K 5000K 6000K 6500K

C Plane Distribution Diagram



Photometry

Dynamic White



Beam illumination height

PRODUCT DETAILS:

Real Light leakage design

Traditional thick design

CCT changable bottom

Change your lighting wirelessly | Make (almost)any lamp dimmable | AI moods in one bulb | Play with colours

FORMORE

PC DOWNLIGHT

High Quality · High Brightness · Energy Saving · Long Life · Maintenance-free

PAODUCT FEATURES

- High quality heat dissipation and fireproof Grade III plastic material.
- Anti glare UGR<19, no dark area, no yellowing, no flickering.erial.
- Flexible installation recessed and surface frame design to meet different requirement.
- PCB solution with PMMA Lens backlite solution for panel light.
- More safe and durable with 3 year warranty.
- IP Class: IP20.
- IK Class: IK03.

APPLICATION AREA

Hotel · Offices · Residential · Conference rooms · Schools · Public facilies · Hospital

Mothproof · Flameproof · Dustproof · Anti-electric shock

DIMENSIONS & SPECIFICATIONS

Specification

Inch(")	Watts (w)	Voltage(v)	CCT(K)	Luminous Flux(lm)	CRI	P.F.	Beam Angle(°)	Dimension(mm)	Hole Size(mm)	Life(mm)	Warranty
2.5"	3W	220-240V 100-240V	6500K/4000K 3000K	240lm	80	0.5	120°	ϕ90mm*27mm 90mm*90mm*27mm	ø70~ ø80mm 70*70mm~ 80*80mm	25000	2years
4"	6W	220-240V 100-240V	6500K/4000K 3000K	480lm	80	0.5	120°	ϕ120mm*27mm 120mm*120mm*27mm	ø100~ ø110mm 100*100mm~ 110*110mm	25000	2years
5"	9W	220-240V 100-240V	6500K/4000K 3000K	720lm	80	0.5	120°	ϕ150mm*27mm 150mm*150mm*27mm	ø125~ ø135mm 125*125mm~ 135*135mm	25000	2years
6"	12W	220-240V 100-240V	6500K/4000K 3000K	960lm	80	0.5	120°	ϕ165mm*27mm 165mm*165mm*27mm	ø140~ ø160mm 140*140mm~ 160*160mm	25000	2years
8"	18W	220-240V 100-240V	6500K/4000K 3000K	1440lm	80	0.5	120°	ϕ220mm*27mm 220mm*220mm*27mm	ø195~ ø210mm 195*195mm~ 210*210mm	25000	2years
12"	24W	220-240V 100-240V	6500K/4000K 3000K	1920lm	80	0.5	120°	ϕ295mm*27mm 295mm*295mm*27mm	ø270~ ø285mm 270*270mm~ 280*285mm	25000	2years

FORMORE

LED NIGHTLUX PANEL LIGHT

High Quality | High Brightness | Energy Saving | Long Life | Maintenance-free

PRODUCT FEATURES

- High-performance led chip, energy saving, high light efficiency.
- High quality with 5 years warranty, long lifespan > 50,000hrs
- Green environmental protection, no ultraviolet infrared and mercury pollution
- High CRI intuitive display, different color temperature for option.
- Suspension, Recessed, Ceiling Surface Mounting kit for option.
- Aluminum heat sink material and design, ensure the long lifespan
- With a night light function, can meet the night use.
- IP Class:IP20

HOW TO USE THE NIGHT LIGHT

Series	Watt	PF	Cut-out	Efficiency	Lumen	WorKing Temperature	Dimension
NightLux	9W+3W	0.9	Φ4in	75lm/w	675lm	-20~50℃	Φ4,72in
NightLux	12W+3W	0.9	Φ6in	75lm/w	960lm	-20~50℃	Φ6,85in

Voltage: AC 85-265V

CE.ROHS.SAA.ETL.BIS

3000K | 4000K | 5000K | 6000K | 6500K

C Plane Distribution Diagram

Photometry

Dynamic White



Beam illumination height

AC 85-265V | PF ≥0.9 | CRI 80/90 | DIM | IP40 | 120度

Change your lighting wirelessly | Make (almost)any lamp dimmable | AI moods in one bulb | Play with colours

FORMORE

LED CEILING LIGHT

Perfect for bathroom,living room,kitchen,etc

18W | 3CCT (3000K-5000K) | CRI90+ | Dimmable 5%-100% | Voltage 120V | 50000 hrs Lifespan

FULLY DIMMABLE

5%-100% Dimmable Brightness

WIDE APPLICATION

• living room • Dining room • Kitchen • Bedroom

ONE LIGHT 3 COLOR TEMPERATURE

Push the Switch
Easy To Choose Your Favorite Color Temperature

3000k/Warm White | 4000k/Natural White | 5000k/Cool White

EASY INSTALLATION

ACCESSORIES

❶ Plastic anchor x4	❹ Wire nuts x2
❷ Sheet metal screws x4	❺ Connectors x2
❸ Short machine screws x2	❻ Nuts x4
❼ Long machine screws x2	

Brighter & High Energy Efficiency

Ours
- 3CCT-3000k/4000k/5000k
- 24W
- CRI 90+
- Dimmable

Other
- 4000k
- 20W
- CRI 75+
- No Dimmable

Series	Item	Materials	Watt	PF	Work Volt	Efficiency(lm/W)	Lumens(lm)	Work Tem	Dimensions(mm)
WSUSDL-R01	Ceiling Light	ALU+PC	18	0.9	AC120V	100	18000	-20 ~ 50°C	Φ300*21
WSUSDL-R02	Ceiling Light	ALU+PC	24	0.9	AC120V	100	24000	-20 ~ 50°C	Φ400*21
WSUSDL-R03	Ceiling Light	ALU+PC	36	0.9	AC120V	100	36000	-20 ~ 50°C	Φ500*21

FORMORE

LED COB DOWN LIGHT

High Quality | High Brightness | Energy Saving | Long Life | Maintenance-free

PRODUCT FEATURES

- High-performance led chip, energy saving, high light efficiency.
- High quality with 3 years warranty, long lifespan≥50,0000hrs
- Easy to install.
- High quality Die-casting aluminum shell adopted to settle for LED heat releasing and to ensure LED life time.
- High-temperature resistance.
- Green environmental protection, no ultraviolet, infrared and mercury pollution.
- High CRI, intuitive display, different color temperature for option.
- Suspension, Recessed, Ceiling Surface Mounting kit for option.
- IP Class:IP20

APPLICATION AREA

Hotel | Corridor | Residential | Conference rooms
Schools | Public facilities | Hospital | Exhibition hall

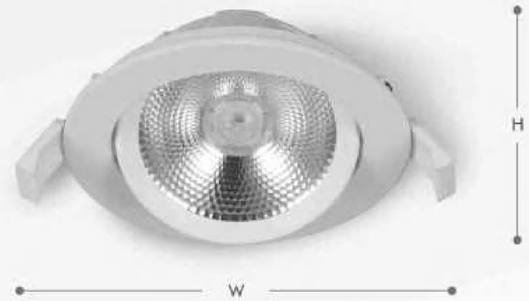

AC 85-265V | PF ≥0.9 | CRI 80/90 | IP65 | DIM | 36° | 60° | 30°

Series	Wattage	Size(inch)	Dimension	Cut-out	Efficiency
WSDL01	3W	2.5	Ø80x20 Round 80x80x20 Square	Ø64	80Lm/w
WSDL02	6W	3	Ø90x22 Round 90x90x22 Square	Ø74	80Lm/w
WSDL03	9W	3	Ø95x22 Round 95x95x22 Square	Ø79	80Lm/w
WSDL04	12W	3	Ø95x22 Round 95x95x22 Square	Ø79	90Lm/w
WSDL05	15W	4	Ø110x22 Round 110x110x22 Square	Ø98	90Lm/w
WSDL06	18W	4.3	Ø120x23.5 Round 120x120x23.5 Square	Ø108	90Lm/w

LED TYPE: COB Down Light **Voltage:** AC 85-265V

3000K | 4000K | 5000K | 6000K | 6500K

Dynamic Warm | Dynamic White

LIGHT DISTRIBUTION OPTIONAL

15° | 30° | 45° | 60° | 90°



FORMORE

PROLITE COB

High Quality | High Brightness | Energy Saving | Long Life | Maintenance-free

PRODUCT FEATURES

- High-performance led chip,energy saving,high light efficiency.
- High quality with 3 years warranty, long lifespan≥50,0000hrs.
- High quality Die-casting aluminum shell adopted to settle for LED heat releasing and to ensure LED life time.
- High-temperature resistance.
- Green environmental protection, no ultraviolet, infrared and mercury pollution.
- Hiah CRI, intuitive display, different color temperature for option.
- Suspension,Recessed,Ceiling Surface Mounting kit for option.

APPLICATION AREA

Hotel · Corridor · Residential · Conference rooms
Schools · Public facilities · Hospital · Exhibition hall

Series	Wattage	Watt	PF	Cut-out	Efficiency	Lumen	WorKing Temperature	Dimension
PROLITE01	3W	3	0.5	Φ55	85	255	-20~50℃	φ70
PROLITE02	6W	6	0.5	Φ55	85	510	-20~50℃	φ70
PROLITE03	9W	9	0.5	Φ70	85	765	-20~50℃	φ90
PROLITE04	12W	12	0.5	Φ85	90	1080	-20~50℃	φ100
PROLITE05	16W	12	0.5	Φ90	90	1440	-20~50℃	φ110
PROLITE06	24W	24	0.5	Φ125	90	2160	-20~50℃	φ145
PROLITE07	30W	30	0.5	Φ125	90	2700	-20~50℃	φ145

LED TYPE: COB Down Light **Voltage:** AC 85-265V

3000K 4000K 5000K 6000K 6500K

Dynamic Warm

Dynamic White

LIGHT DISTRIBUTION OPTIONAL



AC 85-265V | PF ≥0.9 | CRI 80/90 | IP65 | DIM | 36° | 60° | 30°

FORMORE

LED EDGLITE PANEL LIGHT

High Quality | High Brightness | Energy Saving | Long Life | Maintenance-free

PRODUCT FEATURES

- Beautiful appearance,high performance and excellent cooling property.
- Low power consumption,more than 50% energy saving compared to traditional fixture.
- 4 times life span than traditional FL fixturee .
- IP Class:IP20
- UGR<22
- PF:0.9
- Ambient Temperature: -10℃-45℃
- High quality with 5 years warranty.

INSTALLED OPTION

recessed | surface mounted | suspended

APPLICATION AREA

Hotel · Offices · Residential · Conference rooms · Schools · Public facilities · Hospital

85-265V | ≥80 | PF≥0. 9 | 30000H | 100°

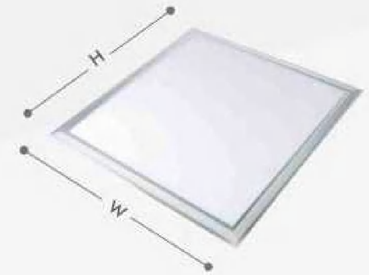

Series	Wattage	A(mm)	B(mm)	C(mm)	Efficiency
WS-BPL-1-E	24W	300mm	300mm	10.5mm	120Lm/w
WS-BPL-2-E	40W	300mm	600mm	10.5mm	120Lm/w
WS-BPL-3-E	48W	300mm	1200mm	10.5mm	120Lm/w
WS-BPL-4-E	48W	600mm	600mm	10.5mm	120Lm/w
WS-BPL-5-E	60W	600mm	1200mm	10.5mm	120Lm/w

Voltage: AC 85-265V **Shape:** Round/Sqaure

3000K | 4000K | 5000K | 6000K | 6500K

Photometry



Beam illumination height

Waterproof | Fire rating | Power saving | Care of eyes | Highlighting light source

FORMORE

ETL BACKLITE PANEL LIGHT

High Quality | High Brightness | Energy Saving | Long Life | Maintenance-free

PRODUCT FEATURES

- Beautiful oppeorance, high performance and excellent cooling property.
- Low power consumption, more than 50% energy saving compared to traditional fixture
- 4 times lifespan than traditional fixture.
- 3CCT can be switched
- Ambient Temperature:-10-45
- High quality with 5 years warranty.
- With iron box drive for North American market

INSTALLED OPTION

recessed | surface mounted | suspended

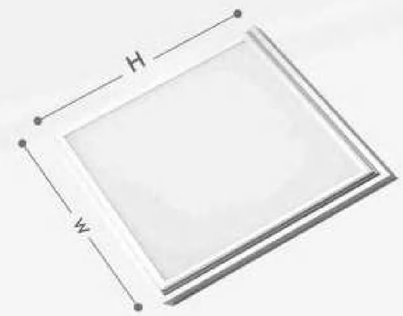

Series	Watt	PF	Efficiency	Lumen	WorKing Temperature	Dimension
WS0901	40	0.9	110	4400	-20~50℃	603*603
WS0901	60	0.9	110	6600	-20~50℃	603*1213
WS0901	40	0.9	110	4400	-20~50℃	303*1213

Voltage: AC 85-265V **Shape:** Round/Sqaure

3000K | 4000K | 5000K | 6000K | 6500K



Photometry



Beam illumination height

85-265V | ≥80 | PF≥0.9 | 30000H | 100°

Waterproof | Fire rating | Power saving | Care of eyes | Highlighting light source

FORMORE

LED BACKLITE PANEL LIGHT

High Quality · High Brightness · Energy Saving · Long Life · Maintenance-free

PRODUCT FEATURES

- Beautiful appearance,high performance and excellent cooling property.
- Low power consumption,more than 50% energy saving compared to traditional fixture.
- 4 times life span than traditional FL fixturee.
- IP Class:IP20 • UGR<22 • PF:0.9
- Ambient Temperature: -10°C-45°C
- High quality with 5 years warranty.

APPLICATION AREA

Hotel · Offices · Residential · Conference rooms · Schools · Public facilities · Hospital

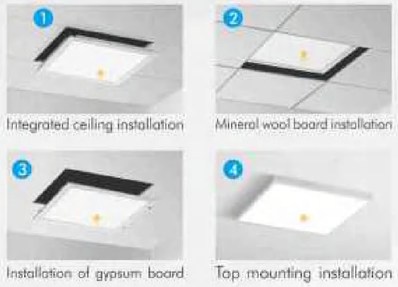

1 Integrated ceiling installation
2 Mineral wool board installation
3 Installation of gypsum board
4 Top mounting installation

INSTALLED OPTION

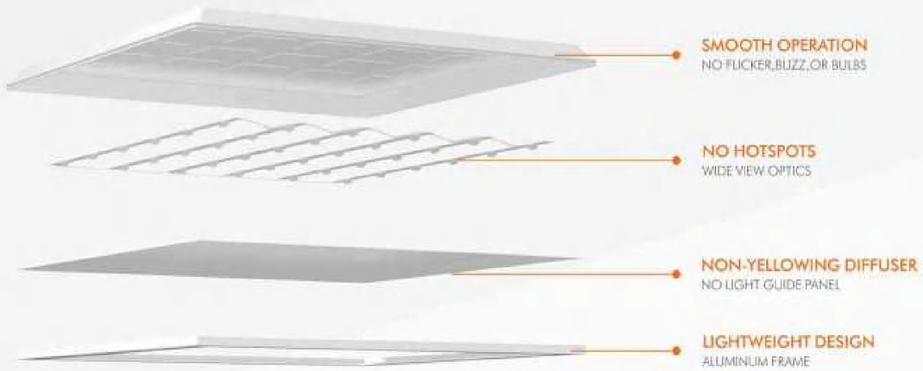

85-265V · ≥80 · PF≥0.9 · 50000H · 100°

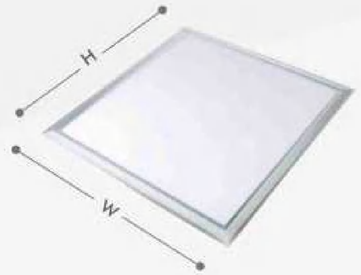

Series	RA	Voltage	Power	Color	CCT	Material	Efficiency	IP
WS-BPL-1-B	80	85-265V	18W	Siliver/White	3000K/4000K/6000K	AL+PC	120LM/W	20
WS-BPL-2-B	80	85-265V	36W	Siliver/White	3000K/4000K/6000K	AL+PC	120LM/W	20
WS-BPL-3-B	80	85-265V	40W	Siliver/White	3000K/4000K/6000K	AL+PC	120LM/W	20
WS-BPL-4-B	80	85-265V	40W	Siliver/White	3000K/4000K/6000K	AL+PC	120LM/W	20
WS-BPL-5-B	80	85-265V	72W	Siliver/White	3000K/4000K/6000K	AL+PC	120LM/W	20

Voltage: AC 85-265V **Shape:** Round/Sqaure

3000K · 4000K · 5000K · 6000K · 6500K



Photometry



Dynamic White



Beam illumination height

Waterproof · Fire rating · Power saving · Care of eyes · Highlighting light source

FORMORE

LED VAPOR LIGHT
MODEL 29 SERIES

PRODUCT FEATURES

- High-performance led chip.
- High quality with 5 years warranty, long lifespan≥50,000hrs.
- Directional light – LEDs are directional, reducing the need for reflectors and diffusers that can trap light.
- LED Linear lights offer a large range of color temperatures.
- Green environmental protection, no ultraviolet, infrared and mercury pollution.
- High CRI, intuitive display, different color temperature for option.
- Suspension, ceiling or wall surface mounting.
- IP Class:IP65

APPLICATION AREA

Conference rooms · Shopping mall · Fitness room · Parking lot
Factory workshops · Warehouse · Subway station

Series	Wattage	Size (WxHxD)mm Wide Version	Lumen
WS2901	15W	94x77x600mm	1500Lm
WS2902	20W	94x77x600mm	2000Lm
WS2903	30W	94x77x1200mm	2800Lm
WS2904	40W	94x77x1200mm	3600Lm
WS2905	40W	94x77x1500mm	3600Lm
WS2906	60W	94x77x1500mm	5400Lm
WS2907	80W	94x77x1500mm	7200Lm

Voltage: AC220-240V **Shape**: SAMSUNG SMD

3000K 4000K 5000K 6000K 6500K

Dynamic Warm Dynamic White

C Plane Distribution Diagram



Beam angle 120°



Beam Illumination height

120° CRI Anti-uv 5 Years 50000H

FORMORE